



MINI MAGLITE TORCH 18952




CONTENTS

- 1 x Mini Maglite Torch in a plastic case
- 2 x AA batteries

OPERATION

To insert batteries

1. Remove the tail cap.
2. The large end of the battery spring must be snapped into the tail cap.
3. Install the batteries with the '+' (positive) facing the head of the torch; the '-' faces the tail cap of the torch.
4. Replace the tail cap.

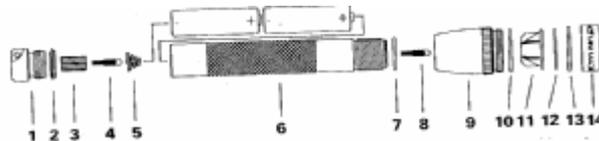

Component parts

(left to right)

1. Tail cap
2. Lip seal of Tail Cap
3. Lamp protector
4. Spare lamp
5. Battery spring*
6. Barrel
7. O-ring of Barrel
8. Lamp
9. Head
10. O-ring of Head
11. Reflector
12. Clear lens
13. O-ring of Face Cap
14. Face Cap

*5 inserts into 1 i.e. battery spring inserts inside tail cap

USE

1. To switch on, twist the head.
2. Rotate the head of the torch to adjust from a wide flood beam to an intense spotlight.

3. To use the torch in candle mode, unscrew the whole head of the torch and invert the head. Place the tail end of the torch into the inverted head, like a candle.
4. Turn in the opposite direction to switch off the torch. Switch off after use to preserve the batteries.

CARE & MAINTENANCE

- **Do not** immerse in water
- Check batteries for leakage
- Replace used batteries immediately
- Remove the batteries if the torch will not be used for prolonged periods (once a month or less)
- Place a small amount of petroleum jelly on all threads and rubber O-rings every six months
- **Do not** drop the torch
- **Do not** strike the torch against hard surfaces

There is a spare lamp inside the tail cap. To change the lamp: unscrew the entire head assembly and gently pull the lamp from the socket. Make sure the new lamp pins are straight, and insert them into the socket. Use only replacement lamps of the same specification. These can be ordered from ROMPA[®] - please quote code 18953.

BATTERY CARE

Do not mix old/new batteries or different types of batteries or different brands of batteries.

Use only alkaline batteries.

Do not use rechargeable batteries.

Remove exhausted batteries – replace whole sets not just one.

Do not attempt to recharge non-rechargeable batteries.

Observe the polarity indicated and noted above.

The supply terminals are not to be short-circuited.

Do not dispose of batteries in fire

TROUBLESHOOTING

In the unlikely event of problems, please check the following:

Torch failure

Check the lamp and replace as necessary

Check the batteries and replace as necessary

Torch does not turn on or stay on

Check the tail cap. The metal surfaces contacting the barrel, tail cap and spring assembly should be shiny metal without obstruction between them. Any corrosion or foreign substance should be carefully removed.

SAFETY

Always supervise the use of this product.

For seven years and over.

SPECIFICATION

Size: 15cmL x 2cm diameter

Weight: 107g

Aluminium

Anodized inside and out to protect against corrosion

Colours may vary